

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2004 (06.05.2004)


PCT

(10) International Publication Number  
**WO 2004/037680 A1**

- (51) International Patent Classification<sup>7</sup>: **B65D 88/16**
- (21) International Application Number:  
PCT/CA2003/001610
- (22) International Filing Date: 22 October 2003 (22.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2,409,471 23 October 2002 (23.10.2002) CA
- (71) Applicant (*for all designated States except US*): **LSI - LIFT SYSTEMS INCORPORATED** [CA/CA]; 1104 - 10080 - Jasper Avenue, Edmonton, Alberta T5J 1V9 (CA).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **BAKER, Gerald, Lynn** [CA/CA]; #50, 52442 Range Road 220, Ardrossan, Alberta T8E 5G9 (CA). **MICHAELS, Richard, Stephen** [CA]; 37 Otter Crescent, St. Albert, Alberta T8N 6Y6 (CA).
- (74) Agent: **THOMPSON, Douglas, B.**; c/o Thompson Lambert LLP, 10328 - 81 Avenue, Suite #200, Edmonton, Alberta T6E 1X2 (CA).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**  
— *of inventorship (Rule 4.17(iv)) for US only*
- Published:**  
— *with international search report*  
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

[Continued on next page]

(54) Title: **BULK BAG AND RIGID FORK LIFT TINE RECEIVING MEMBER COMBINATION**

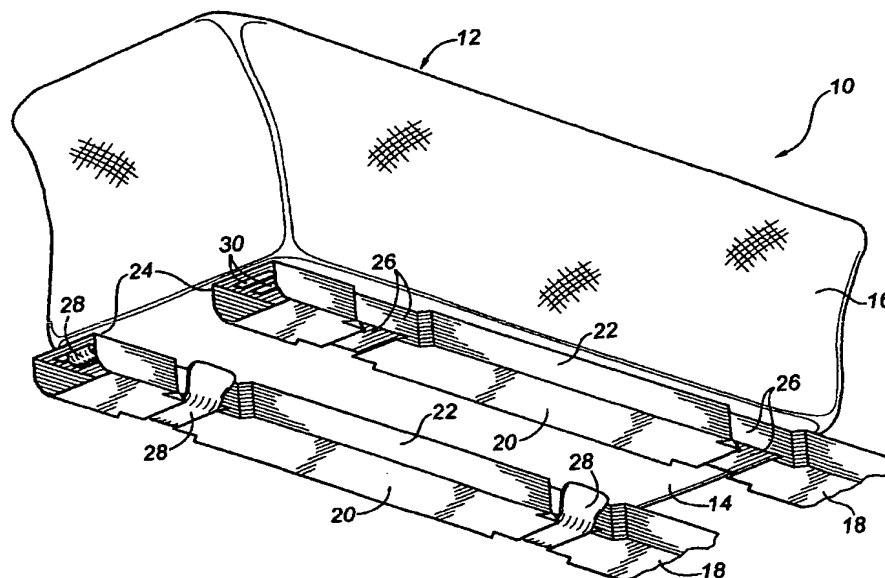

(57) Abstract: A bulk bag (12) and rigid fork lift tine receiving member (18) combination. The combination includes a bulk bag (12) having a bottom (14) and a peripheral sidewall (16). Two rigid parallel-piped fork lift tine receiving members (18) are provided, each having an exterior surface with a tie receiving channel (26) extending across a bottom face (20) of the exterior surface. The fork lift tine receiving members (18) are tied with ties (28) to the bottom of the bulk bag (12). The ties (28) are positioned within the receiving channels (26), which protects them from wear as the fork lift tine receiving members (18) move across a floor.

WO 2004/037680 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**TITLE OF THE INVENTION:**

Bulk Bag and Rigid Fork Lift Tine Receiving Member  
Combination

**5 FIELD OF THE INVENTION**

The present invention relates to a bulk bag and rigid fork lift tine receiving member combination.

**BACKGROUND OF THE INVENTION**

10 United States Patent 6,213,305 (Baker et al 2001) describes a bulk bag which has a pair of flexible sleeves depending from the bottom of the bulk bag. Rigid fork lift tine receiving members are inserted into the sleeves. This facilitates the insertion of fork lift tines into the fork  
15 lift tine receiving members, so that the bulk bag may be lifted by a fork lift.

Although beneficial results may be obtained through the use of the bulk bag and rigid fork lift tine receiving  
20 members, as described by Baker et al; after prolonged use the sleeves on the bottom of the bulk bag tend to become worn. This is due to the fact that the sleeves are frequently in contact with the floor.

**25 SUMMARY OF THE INVENTION**

What is required is a bulk bag and rigid fork lift tine receiving member combination which will have greater wear resistance.

30 According to the present invention there is provided a bulk bag and rigid fork lift tine receiving member combination. The combination includes a bulk bag having a bottom and a peripheral sidewall. Two rigid parallel-piped fork lift tine receiving members are provided, each having  
35 an exterior surface with a tie receiving channel extending

across a bottom face of the exterior surface. The fork lift tine receiving members are tied with ties to the bottom of the bulk bag. The ties are positioned within the receiving channels. Further beneficial results may be obtained through the use of velcro ties.

With the combination, as described above, the ties used to secure the fork lift tine receiving members to the bottom of the bulk bag are protected from wear within the tie receiving channel as the bottom face of the fork lift tine receiving members move across a floor.

Although beneficial results may be obtained through the use of the combination, as described above, it is desirable to limit movement of the fork lift tine receiving members as much as possible. Even more beneficial results may, therefore, be obtained when adjacent side faces of the fork lift tine receiving members also have tie receiving channels. The tie receiving channels on the adjacent side faces help to limit movement of the fork lift tine receiving members. It is preferred that the tie receiving channel on the bottom face be substantially aligned with the tie receiving channels in the adjacent side faces.

There are two alternative approaches to providing the above described tie receiving channels. A first approach is to have the tie receiving channel or channels recessed relative to the exterior surface of the fork lift tine receiving member. A second approach is to have the tie receiving channel or channels raised so that they protrude from the exterior surface.

Although beneficial results may be obtained through the use of the combination, as described above, even more beneficial results may be obtained when the recessed tie

receiving channel or channels are in the form of a dovetail groove. This structure allows a tie, such as a belt, to be inserted into the groove in one orientation and resists the removal from the groove in another orientation.

5 Further beneficial results may be obtained through the use of slots positioned at the outward ends of the fork lift tine receiving members adapted to receive further ties.

#### 10 **BRIEF DESCRIPTION OF THE DRAWINGS**

These and other features of the invention will become more apparent from the following description in which reference is made to the appended drawings, the drawings are for the purpose of illustration only and are not  
15 intended to in any way limit the scope of the invention to the particular embodiment or embodiments shown, wherein:

**FIGURE 1** is a perspective view of a bulk bag/fork lift tine retaining member combination constructed in accordance with the teachings of the present invention, having  
20 recessed tie receiving channels.

**FIGURE 2** is a longitudinal section view of the bulk bag/fork lift tine retaining member combination illustrated in **FIGURE 1**.

**FIGURE 3** is a perspective view of a bulk bag/fork lift  
25 tine retaining member combination constructed in accordance with the teachings of the present invention, having raised tie receiving channels.

**FIGURE 4** is a detail, perspective view of a bulk bag/fork lift tine retaining member combination constructed  
30 in accordance with the teachings of the present invention, having a recessed bottom tie receiving channel and raised side tie receiving channels.

**FIGURE 5** is a detailed perspective view of a belt tie.

**FIGURE 6** is a detailed perspective view of an

elasticized tie.

**FIGURE 7** is a perspective view of a fork lift tine receiving member with stops.

#### 5 **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

A first preferred embodiment of bulk bag/fork lift tine retaining member, generally identified by reference numeral 10, will now be described with reference to **FIGURES 1 and 2**. A second preferred embodiment of bulk bag/fork lift tine retaining member, generally identified by reference numeral 100, will now be described with reference to **FIGURE 3**. A third preferred embodiment of bulk bag/fork lift tine retaining member, generally identified by reference numeral 200, will now be described with reference to **FIGURE 4**. Variations on ties will now be described with reference to **FIGURES 5 through 7**.

Structure and Relationship of Parts of First Embodiment 10:

20 Referring to **FIGURE 1**, bulk bag 12 has a bottom 14 and peripheral sidewall 16. Fork lift tine receiving members 18, each have a bottom face 20, side faces 22 and outward end 24. Bottom face 20 and side faces 22 each are adapted with recessed tie receiving channels 26. Referring to 25 **FIGURES 1 and 2**, bulk bag 12 is adapted with ties 28 (one side here shown) which are positioned within recessed tie receiving channels 26. Slots 30 positioned at outward ends 24 receive further ties (one shown) 28.

30 Operation:

The use and operation of a Bulk Bag and Rigid Fork Lift Tine Receiving Member Combination generally identified by reference numeral 10, will now be described with reference to **FIGURES 1 through 2**. Referring to **FIGURE 1**,

fork lift tine receiving members 18 are positioned under bulk bag 12 and fitted into ties 28 where ties 28 (one side here shown) are positioned within recessed tie receiving channels 26 such that movement of bulk bag 12 is controlled. Referring to **FIGURES 1 and 2**, all ties 28 shown are positioned within recessed tie receiving channels 26 and slots 30. The operation is especially facilitated where the recessed tie receiving channels 26, are dove-tailed. The dove-tailed channels contain the ties, so that they cannot be pulled laterally out of the channels.

#### Structure and Relationship of Parts of Second Embodiment 100:

Referring to **FIGURE 3**, bulk bag 12 has a bottom 14 and peripheral sidewall 16. Fork lift tine receiving members 18, each having a bottom face 20 and side faces 22, are each adapted with raised tie receiving channels 32. Bulk bag 12 is adapted with ties 28 (one side here shown) which are positioned within raised tie receiving channels 32 and slots 30.

#### Operation:

The use and operation of a Bulk Bag and Rigid Fork Lift Tine Receiving Member Combination generally identified by reference numeral 100, will now be described with reference to **FIGURE 3**. Fork lift tine receiving members 18 are positioned under bulk bag 12 and fitted into ties 28 (one side here shown) where ties 28 are positioned within raised tie receiving channels 32 and slots 30 such that movement of bulk bag 12 is controlled. As described above, the operation is especially facilitated where the raised tie receiving channels 32, are dove-tailed to laterally confine the ties.

It is possible to combine the teachings of first embodiment 10 and second embodiment 100 to arrive at a third embodiment 200:

5        Structure and Relationship of Parts of Third Embodiment 200:

Referring to **FIGURE 4**, fork lift tine receiving members 18, have a bottom face 20 and side faces 22. Bottom face 20 is adapted with recessed tie receiving channels 26. 10 Each side face 22 is adapted with raised tie receiving channels 32. Bulk bag 12 is adapted with ties 28 (one here shown) which are positioned within each of recessed tie receiving channels 26 and raised tie receiving channels 32.

15 Operation:

The use and operation of a Bulk Bag and Rigid Fork Lift Tine Receiving Member Combination generally identified by reference numeral 200, is as previously outlined in regard to the previous embodiments.

20

Variations:

The term "tie" is used as all encompassing term to cover all of the many possible variations. Referring to **FIGURE 5**, it can be seen that the tie can be in the form of 25 a belt 34. Belt 34 can be fastened together by any suitable fastener, such as a buckle or mating tape fastener. In the illustrated embodiment, a fastener such as are sold under the Trade Mark "VELCRO" is illustrated. Referring to **FIGURE 6**, the tie can also be in the form of 30 an elastic sleeve 36 which is stretched into position. Sleeve 36 can vary in width, from a relatively narrow sleeve of two to three inches, to a relatively width sleeve that extends for substantially the entire length of the fork lift tine receiving member, to a sleeve of 35 intermediate width of six to twelve inches.



Further, receiving channels 32 on side faces 22 of fork lift time receiving members 18 serve to limit relative axial movement between the ties and the fork lift time receiving members. Referring to **FIGURE 7**, it is possible to accomplish this same objective when fork lift time receiving members 18 have side faces 22 with raised stops 38 which limit relative axial movement of the ties and fork lift time receiving members 18 in one direction.

10

Operation:

The use and operation of the further variations of ties as outlined above is as previously outlined in regard to the previous use of ties.

15

In this patent document, the word "comprising" is used in its non-limiting sense to mean that items following the word are included, but items not specifically mentioned are not excluded. A reference to an element by the indefinite article "a" does not exclude the possibility that more than one of the element is present, unless the context clearly requires that there be one and only one of the elements.

It will be apparent to one skilled in the art that modifications may be made to the illustrated embodiment without departing from the spirit and scope of the invention as hereinafter defined in the Claims.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE  
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

5 1. In combination:

a bulk bag (12) having a bottom (14) and a peripheral  
sidewall (16);

two rigid parallel-piped fork lift tine receiving  
members (18) having an exterior surface with a tie  
10 receiving channel (26) extending across a bottom face (20)  
of the exterior surface;

the fork lift tine receiving members (18) being tied  
with ties (28) to the bottom (14) of the bulk bag (12), the  
ties (28) being positioned within the receiving channels  
15 (26), thereby being protected from wear as the bottom face  
(20) of the fork lift tine receiving members (18) move  
across a floor.

2. The combination as defined in Claim 1, wherein side  
20 faces (22) adjacent to the bottom face (20) of the fork  
lift tine receiving members (18) also have tie receiving  
channels (26).

3. The combination as defined in Claim 2, wherein the tie  
25 receiving channel (26) on the bottom face (20) is aligned  
with the tie receiving channels (26) in the adjacent side  
faces.

4. The combination as defined in Claim 1, wherein the tie  
30 receiving channel (26) is recessed.

5. The combination as defined in Claim 2, wherein the tie  
receiving channels (26) in the adjacent side faces (22) are  
raised and protrude from the exterior surface.

6. The combination as defined in Claim 4, wherein the tie receiving channel (26) is a dove-tail groove.

7. The combination as defined in Claim 1, wherein the tie  
5 (28) is in the form of a belt (34).

8. The combination as defined in Claim 1, wherein slots  
(30) are provided at each of the opposed ends (24) of  
fork lift tine receiving members (18) to receive ties  
10 (28).

9. The combination as defined in Claim 1, wherein the fork  
lift tine receiving members (18) have side faces (22)  
with raised stops (38) which limit relative axial  
15 movement of the ties (28) and the fork lift tine  
receiving members (18) in at least one direction.

10. The combination as defined in Claim 1, wherein the  
ties (28) are in the form of elastic sleeves (36).  
20

11. The combination as defined in Claim 1, wherein the  
ties (28) are two straps (34) which are connected with  
mating tape fasteners.

**FIG. 1**



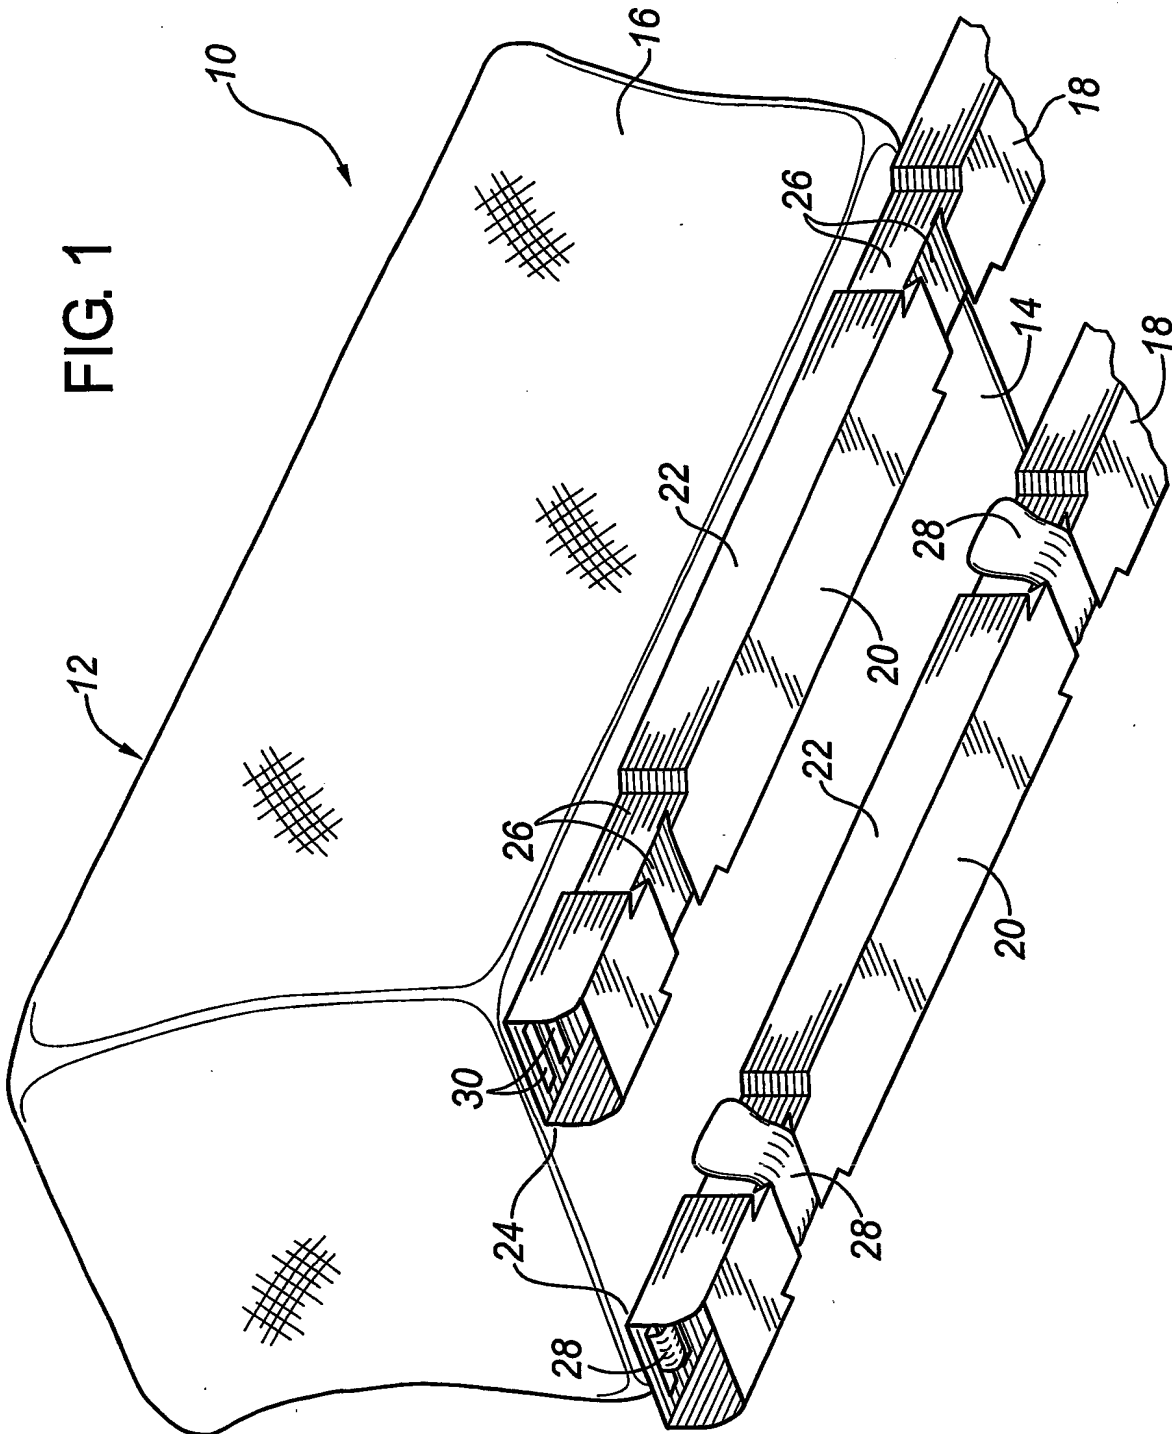


FIG. 2

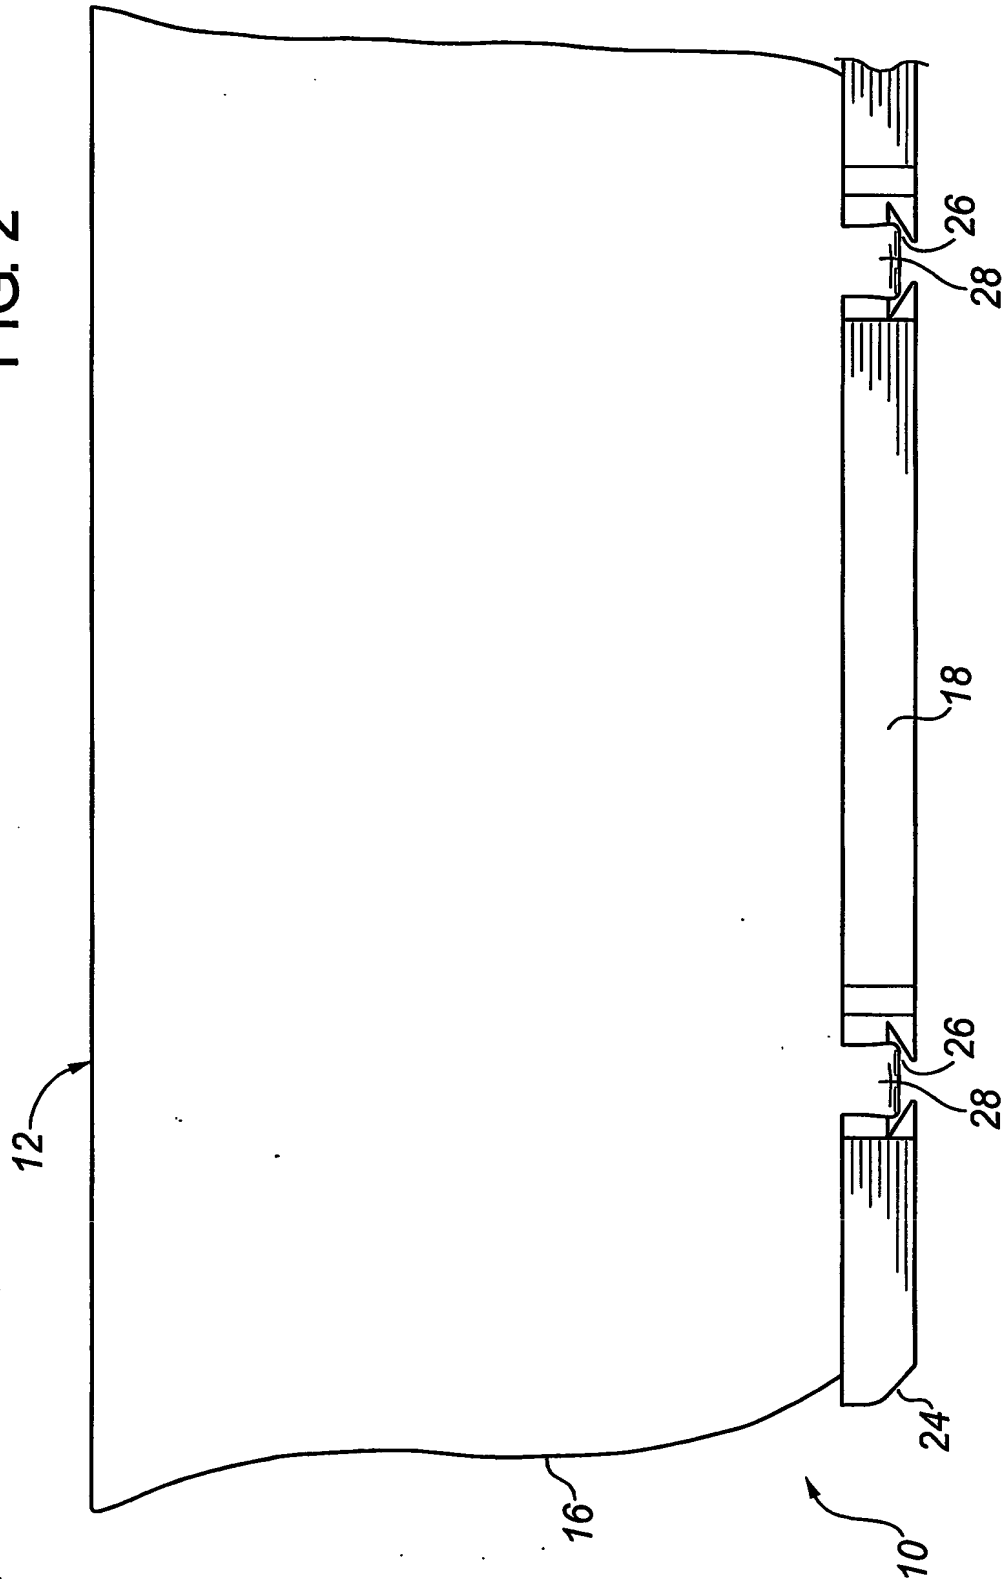


3/4

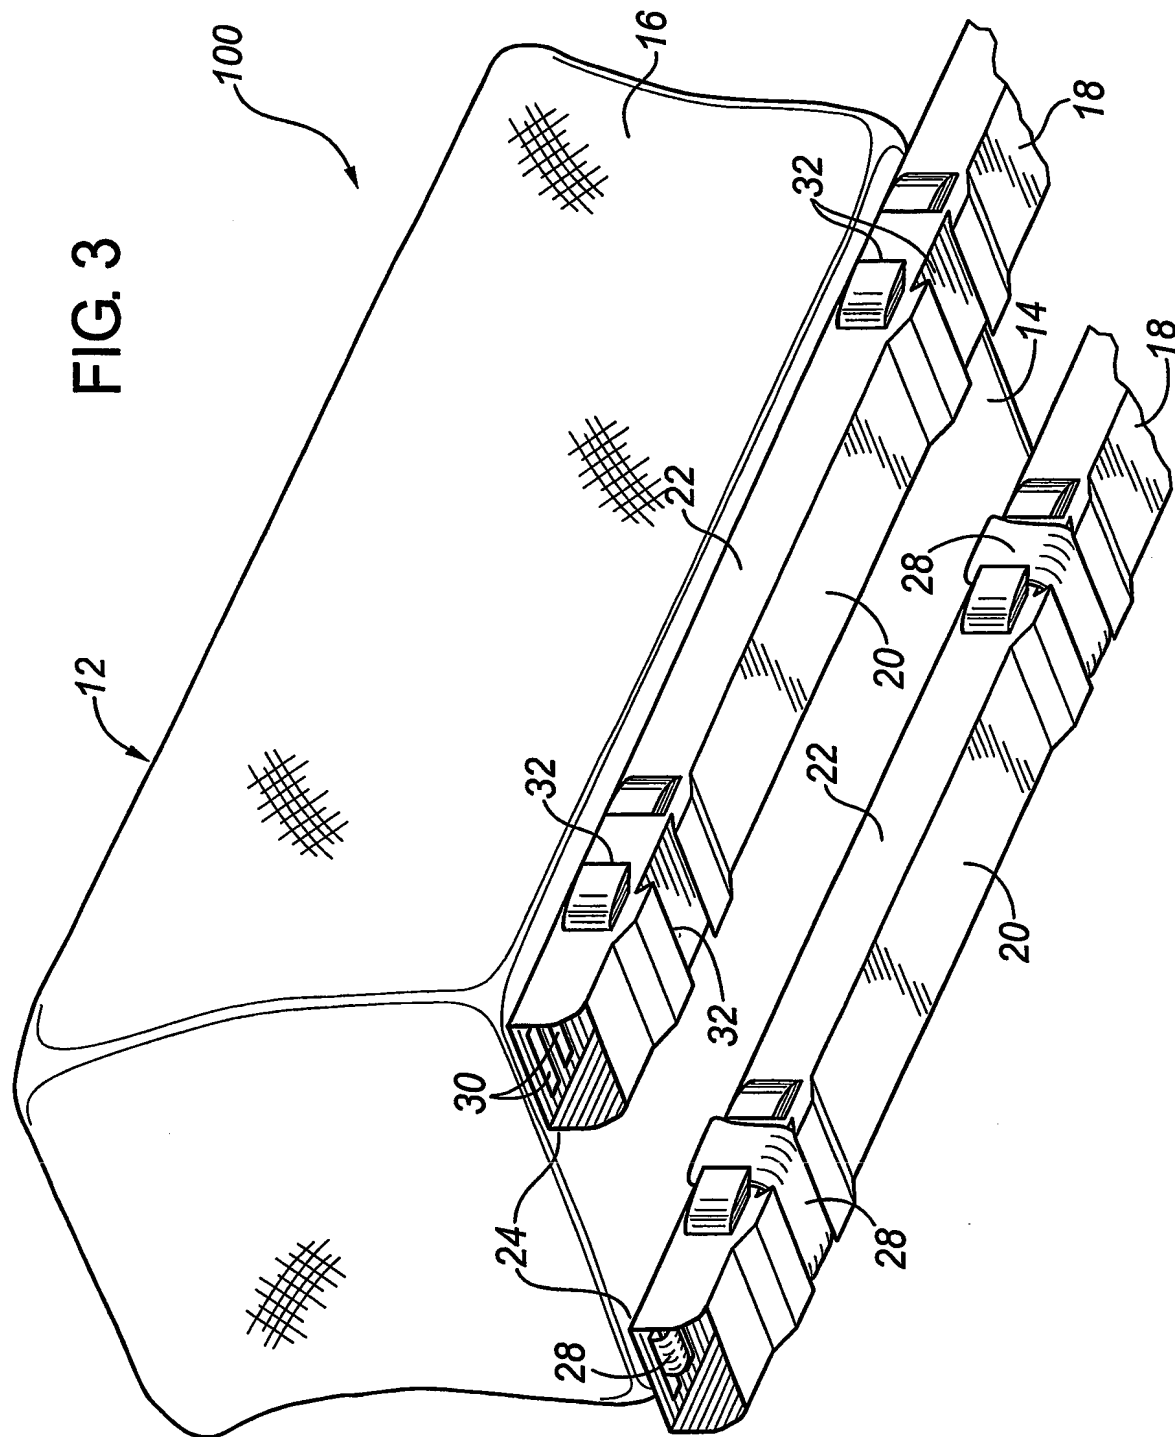

4/4

FIG. 4

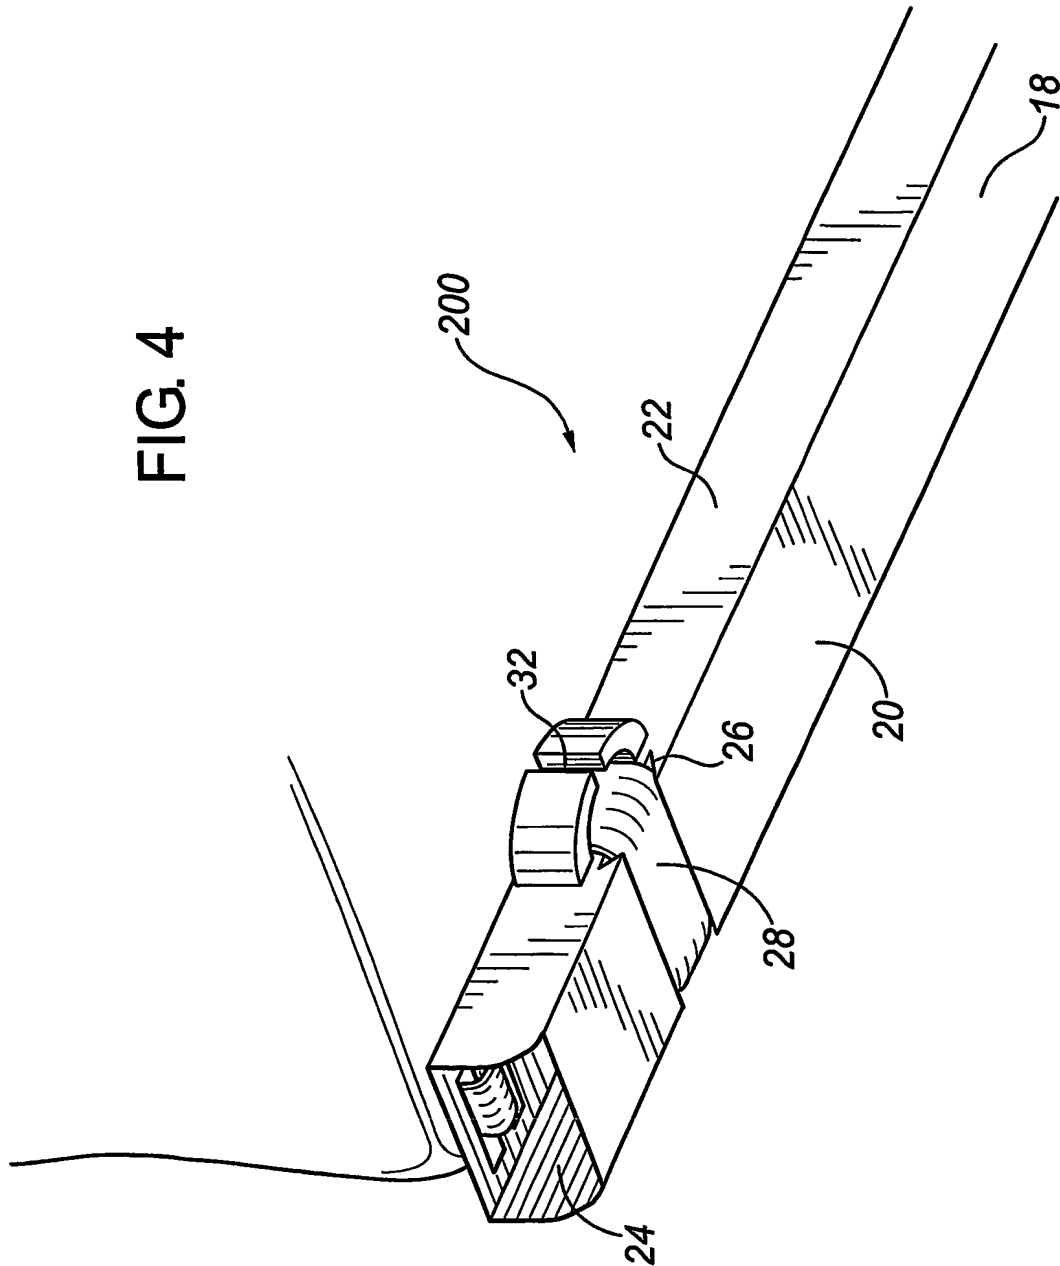

# INTERNATIONAL SEARCH REPORT

International Application No

PC 03/01610

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B65D88/16

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 94 16 379 U (STEIGER ALFRED) 5 January 1995 (1995-01-05) figures	1,7
A	US 6 213 305 B1 (BAKER GERALD LYNN ET AL) 10 April 2001 (2001-04-10) cited in the application the whole document	1,10
A	EP 0 080 126 A (NORSK HYDRO AS) 1 June 1983 (1983-06-01) abstract; figures	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 March 2004

Date of mailing of the international search report

29/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Zanghi, A



## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 03/01610

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 9416379	U	05-01-1995	DE 9416379 U1	05-01-1995
US 6213305	B1	10-04-2001	CA 2272829 A1	26-11-2000
			AT 252032 T	15-11-2003
			AU 4278100 A	18-12-2000
			WO 0073174 A1	07-12-2000
			DE 60005950 D1	20-11-2003
			EP 1187776 A1	20-03-2002
			NZ 516051 A	31-10-2003
			US 2001030142 A1	18-10-2001
EP 0080126	A	01-06-1983	NO 813981 A	25-05-1983
			AU 9061482 A	02-06-1983
			BR 8206774 A	04-10-1983
			DK 520982 A	25-05-1983
			EP 0080126 A1	01-06-1983
			JP 58099385 A	13-06-1983